

4 PIN & SLEEVE FIXING

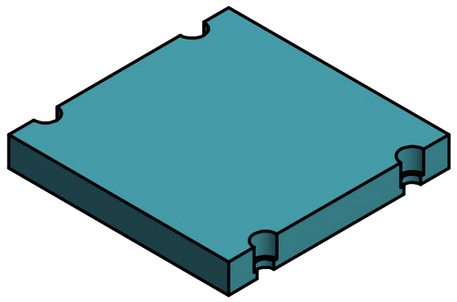


ISOMETRIC VIEW

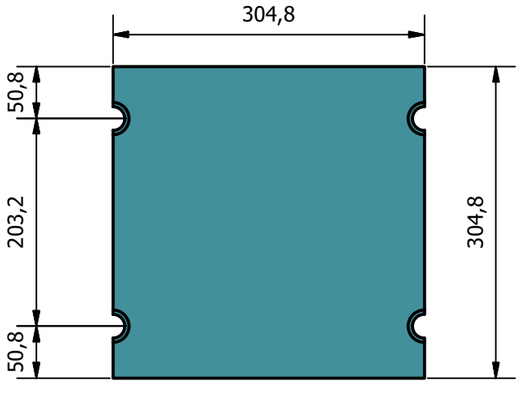


TOP VIEW

6 PIN & SLEEVE FIXING

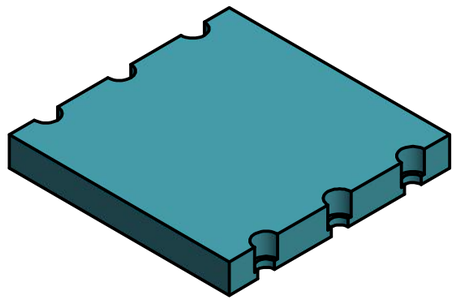


ISOMETRIC VIEW

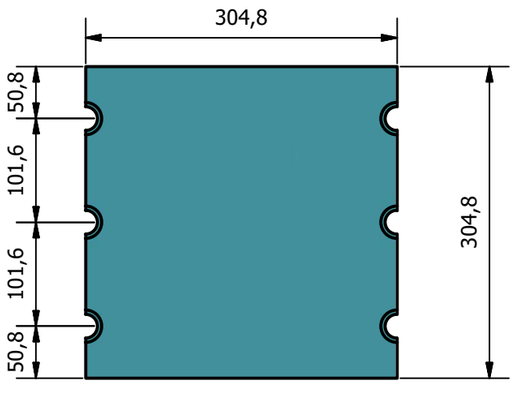


TOP VIEW

4 SNAP ON

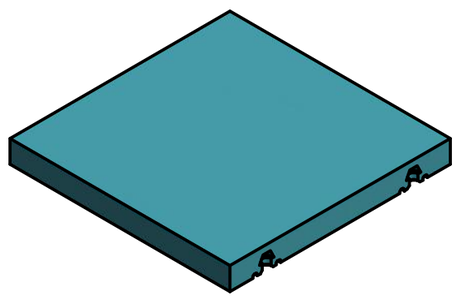

ISOMETRIC VIEW

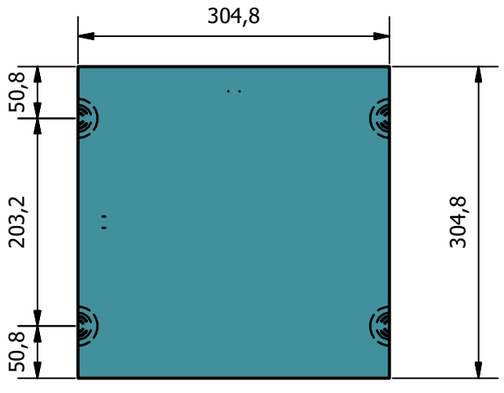

TOP VIEW

PANEL DIMENSIONAL REQUIREMENTS

CLIENT NAME : _____
DATE : _____
CLIENT SIGNATURE : _____
PANEL QUANTITY : _____

APERTURE REQUIREMENTS

MARK X IN REQUIRED BLOCKS

SLOTTED	☐	VR	☐
CONTINUOUS SLOTTED	☐	VR	☐
SQUARE	☐	VRE	☐
ROUND	☐	FLEXI	☐

APERTURE SIZE: _____

L-SHAPE RECURED

YES ☐ NO ☐

HEIGHT IN MM (IF REQUIRED)
_____

MATERIAL REQUIREMENTS

RUBBER	☐
POLYURETHANE	☐

SLOT DIRECTION

WITH FLOW	☐
ACROSS ROW	☐

PANEL FIXING REQUIREMENTS

PIN & SLEEVE	☐
NIPPLE & PIN	☐
SNAP ON	☐
H-PIN & SLEEVE	☐

TOTAL FIXING PINS REQUIREMENTS

4	☐
6	☐
12	☐

PANEL SIZE REQUIREMENTS

300 x 300	☐
305 x 305	☐
610 x 305	☐
750 x 300	☐

PANEL THICKNESS


31 mm	☐	35 mm	☐	40 mm	☐
45 mm	☐	50 mm	☐	55 mm	☐
60 mm	☐	65 mm	☐	70 mm	☐

ADDITIONAL REQUIREMENTS


_____

_____


CLIENT SIGNATURE: .....



SLOTS WITH FLOW



SLOTS ACROSS FLOW

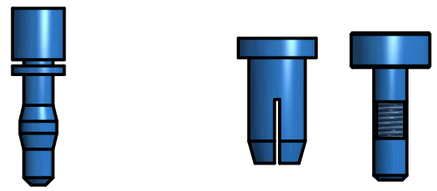

NIPPLE PANEL FIXING PIN & SLEEVE PANEL FIXING




SNAP ON PANEL FIXING


MATERIAL SPECIFICATIONS

HARDNESS :	SHORE A 85
DENSITY :	125 g/cmù
TENSILE STRENGHT :	40 MPA
TEAR STRENGHT :	95 N/mm
ABRASION LOSS :	35
ELONGATION AT BREAK :	600 %

6 NIPPLE & PIN

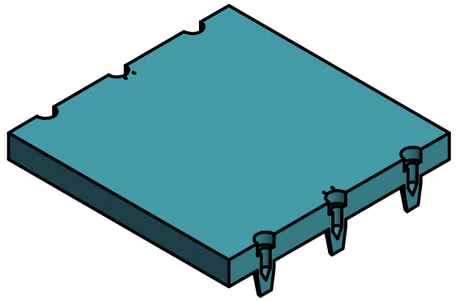


ISOMETRIC VIEW

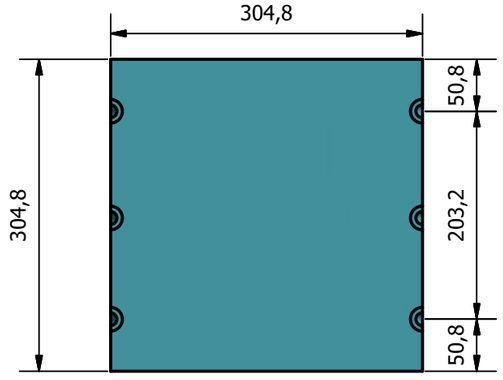


TOP VIEW

4 NIPPLE & PIN

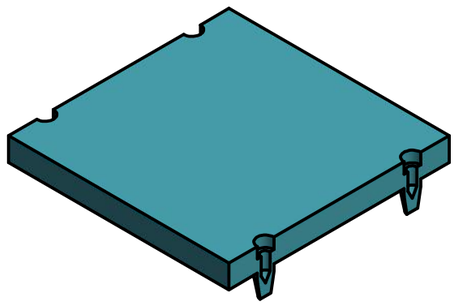

ISOMETRIC VIEW

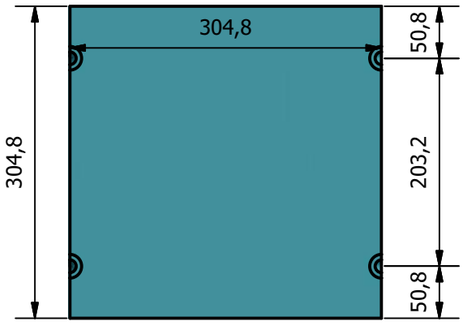

TOP VIEW

AURY AFRICA (PTY) LTD
28 Fuchs Street
Alrode, Alberton
Tel: +27 (0)11 026 6642
Fax: +27 (0)71 353 2862
www.auryafrica.co.za

AURY Africa (Pty) Ltd

	SIGNATURE	DATE
DRAWN	B.BUYS	17/08/2025
CHECKED		
ENG STRUC		
ENG MECH		
ENG ELEC		

CUSTOMER

PROJECT: STANDARD 305MM SQ PANEL DIMENSIONAL REQUIREMENTS

TITLE: CLIENT REFRENCE

SHEET		SCALE	DRAWING NUMBER	REV
1	IF IN DOUBT ASK	AS SPECIFIED	P - STD - 001	1